

**25 NOVEMBER 2011**

**ASX CODE: KAS**

**MIKE SPRATT**  
NON-EXECUTIVE CHAIRMAN

**WAYNE BRAMWELL**  
MANAGING DIRECTOR

**ROD MARSTON**  
NON-EXECUTIVE DIRECTOR

**ROB WEINBERG**  
NON-EXECUTIVE DIRECTOR

**GARY DAVISON**  
NON-EXECUTIVE DIRECTOR

**IAN MCCUBBING**  
NON-EXECUTIVE DIRECTOR

**TREVOR O'CONNOR**  
CFO / COMPANY SECRETARY

**LME TIN PRICE (24/11/11)**

**US\$20,500 / T**  
(CASH BUYER)

**PROJECTS**

**ACHMMACH TIN PROJECT**  
**TAMLALT GOLD PROJECT**

**INVESTMENT DATA**


**SHARES ON ISSUE 364M**

**ABOUT KASBAH**

**KASBAH RESOURCES IS**  
**AN AUSTRALIAN LISTED**  
**MINERAL EXPLORATION AND**  
**DEVELOPMENT COMPANY**  
**ADVANCING THE ACHMMACH**  
**TIN PROJECT TOWARDS**  
**PRODUCTION.**

**OUR PRIME COMMODITY IS TIN.**

## **ACHMMACH DRILLING UPDATE CLARIFICATION**

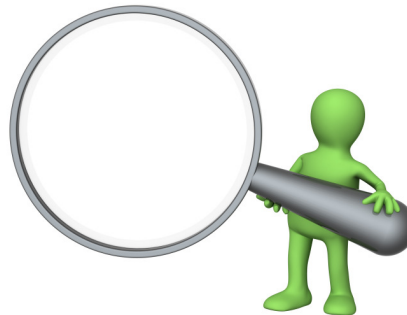

I refer to our "Achmmach Drilling Update" announcement made on 23 November 2011 and for further clarification we provide additional drilling data in the form of Appendix B.



Wayne Bramwell  
**Managing Director**

For further information please go to:

[www.kasbahresources.com](http://www.kasbahresources.com)

Or email:

[info@kasbahresources.com](mailto:info@kasbahresources.com)

**APPENDIX B: AD107 - Significant Results & Drill-hole Details**

Hole ID	Collar UTM 30N WGS84 N	Collar UTM 30N WGS84 E	From (m)	To (m)	Down-hole interval (m)	Tin %
AD107	3714797	243377	235.8	281	45.2	0.64
			291	295	4	0.32
			310	326	17	0.71
			372	380	8	0.35
			403	421	18.7	0.70
		<i>includes</i>	407	412	5	1.38
<b>All Assays and intervals reported below</b>						

Drill Hole	From (m)	To (m)	Intersection Width	Tin Grade %
AD107	235.8	237.3	1.5	1.69
AD107	237.3	238	0.7	0.14
AD107	238	239	1	0.53
AD107	239	240	1	1.12
AD107	240	241	1	0.25
AD107	241	242	1	0.76
AD107	242	242.6	0.6	1.06
AD107	242.6	244	1.4	0.26
AD107	244	245	1	0.31
AD107	245	246	1	0.03
AD107	246	247	1	0.25
AD107	247	248	1	0.25
AD107	248	249	1	0.43
AD107	249	250	1	0.46
AD107	250	251	1	0.14
AD107	251	252	1	0.37
AD107	252	253	1	2.82
AD107	253	254	1	0.12
AD107	254	255	1	0.69
AD107	255	256	1	0.65
AD107	256	257	1	0.6
AD107	257	258	1	0.83
AD107	258	259	1	0.32
AD107	259	260	1	0.35
AD107	260	261	1	0.7
AD107	261	262	1	0.13
AD107	262	263	1	0.47

Drill Hole	From (m)	To (m)	Intersection Width	Tin Grade %
AD107	263	264	1	0.1
AD107	264	265	1	0.59
AD107	265	266	1	2.59
AD107	266	267	1	0.6
AD107	267	268	1	0.31
AD107	268	269	1	0.31
AD107	269	270	1	0.91
AD107	270	271	1	0.05
AD107	271	272	1	0.01
AD107	272	273	1	0.02
AD107	273	274	1	0.37
AD107	274	275	1	0.92
AD107	275	276	1	1.93
AD107	276	277	1	0.47
AD107	277	278	1	0.68
AD107	278	279	1	0.15
AD107	279	280	1	0.52
AD107	280	281	1	2.1
AD107	291	292	1	0.35
AD107	292	293	1	0.19
AD107	293	294	1	0.33
AD107	294	295	1	0.40
AD107	310	311	1	0.37
AD107	311	312	1	0.31
AD107	312	313	1	0.54
AD107	313	314	1	4.78
AD107	314	315	1	0.74
AD107	315	316	1	0.24
AD107	316	317	1	0.48
AD107	316	317	1	0.48
AD107	317	318	1	0.47
AD107	318	319	1	0.44
AD107	319	320	1	0.47
AD107	320	321	1	0.26
AD107	321	322	1	0.20
AD107	322	323	1	0.55
AD107	323	324	1	0.71
AD107	324	325	1	0.63
AD107	325	326	1	0.47
AD107	372	373	1	0.34
AD107	373	374	1	0.51

Drill Hole	From (m)	To (m)	Intersection Width	Tin Grade %
AD107	374	375	1	0.16
AD107	375	376	1	0.43
AD107	376	377	1	0.35
AD107	377	378	1	0.49
AD107	378	379	1	0.24
AD107	379	380	1	0.31
AD107	403	403.7	0.7	0.43
AD107	403	403.7	0.7	0.39
AD107	403.7	405	1.3	0.43
AD107	405	406	1	0.43
AD107	406	407	1	0.52
AD107	407	408	1	0.79
AD107	408	409	1	0.80
AD107	409	410	1	0.56
AD107	410	411	1	2.38
AD107	411	412	1	2.37
AD107	412	413	1	0.38
AD107	413	414	1	0.44
AD107	414	415	1	0.27
AD107	415	416	1	1.27
AD107	416	417	1	0.16
AD107	417	418	1	0.28
AD107	418	419	1	0.08
AD107	419	420	1	0.91
AD107	420	421	1	0.38

**AD110 - Significant Results & Drill-hole Details**

Hole ID	Collar UTM 30N WGS84 N	Collar UTM 30N WGS84 E	From (m)	To (m)	Down-hole interval (m)	Tin %
AD110	3714742	243392	306	313	7	0.72
		<i>includes</i>	308	313	5	0.88
			347	351	4	0.75
			387	392	5	0.54
<b>All Assays and intervals reported below</b>						

Drill Hole	From (m)	To (m)	Intersection Width	Tin Grade %
AD110	306	307	1	0.26
AD110	307	308	1	0.30
AD110	308	309	1	1.71

Drill Hole	From (m)	To (m)	Intersection Width	Tin Grade %
AD110	309	310	1	1.48
AD110	310	310.7	0.7	0.05
AD110	310.7	311.6	0.9	0.10
AD110	311.6	313	1.4	0.77
AD110	347	348	1	0.45
AD110	348	349	1	0.72
AD110	349	350	1	1.35
AD110	350	351	1	0.49
AD110	387	388	1	1.01
AD110	388	389	1	0.23
AD110	389	390	1	0.33
AD110	390	391	1	0.27
AD110	391	392	1	0.80

The information in this report is based on information compiled by Mr Chris Bolger, a Member of the Australasian Institute of Mining and Metallurgy. Mr Bolger is a full-time employee of Kasbah Resources Limited and has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which he is undertaking to qualify as a 'Competent Person' as defined in the 2004 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Mr Bolger consents to the inclusion in this report of the matters based on this information in the form and context in which it appears.